


# S-SERIES

## SWIVEL STACKER

- DESIGNED TO CONVEY FILLED BAGS FROM THE BAG CLOSING LINE TO THE MANUAL PALLETIZING STATION.

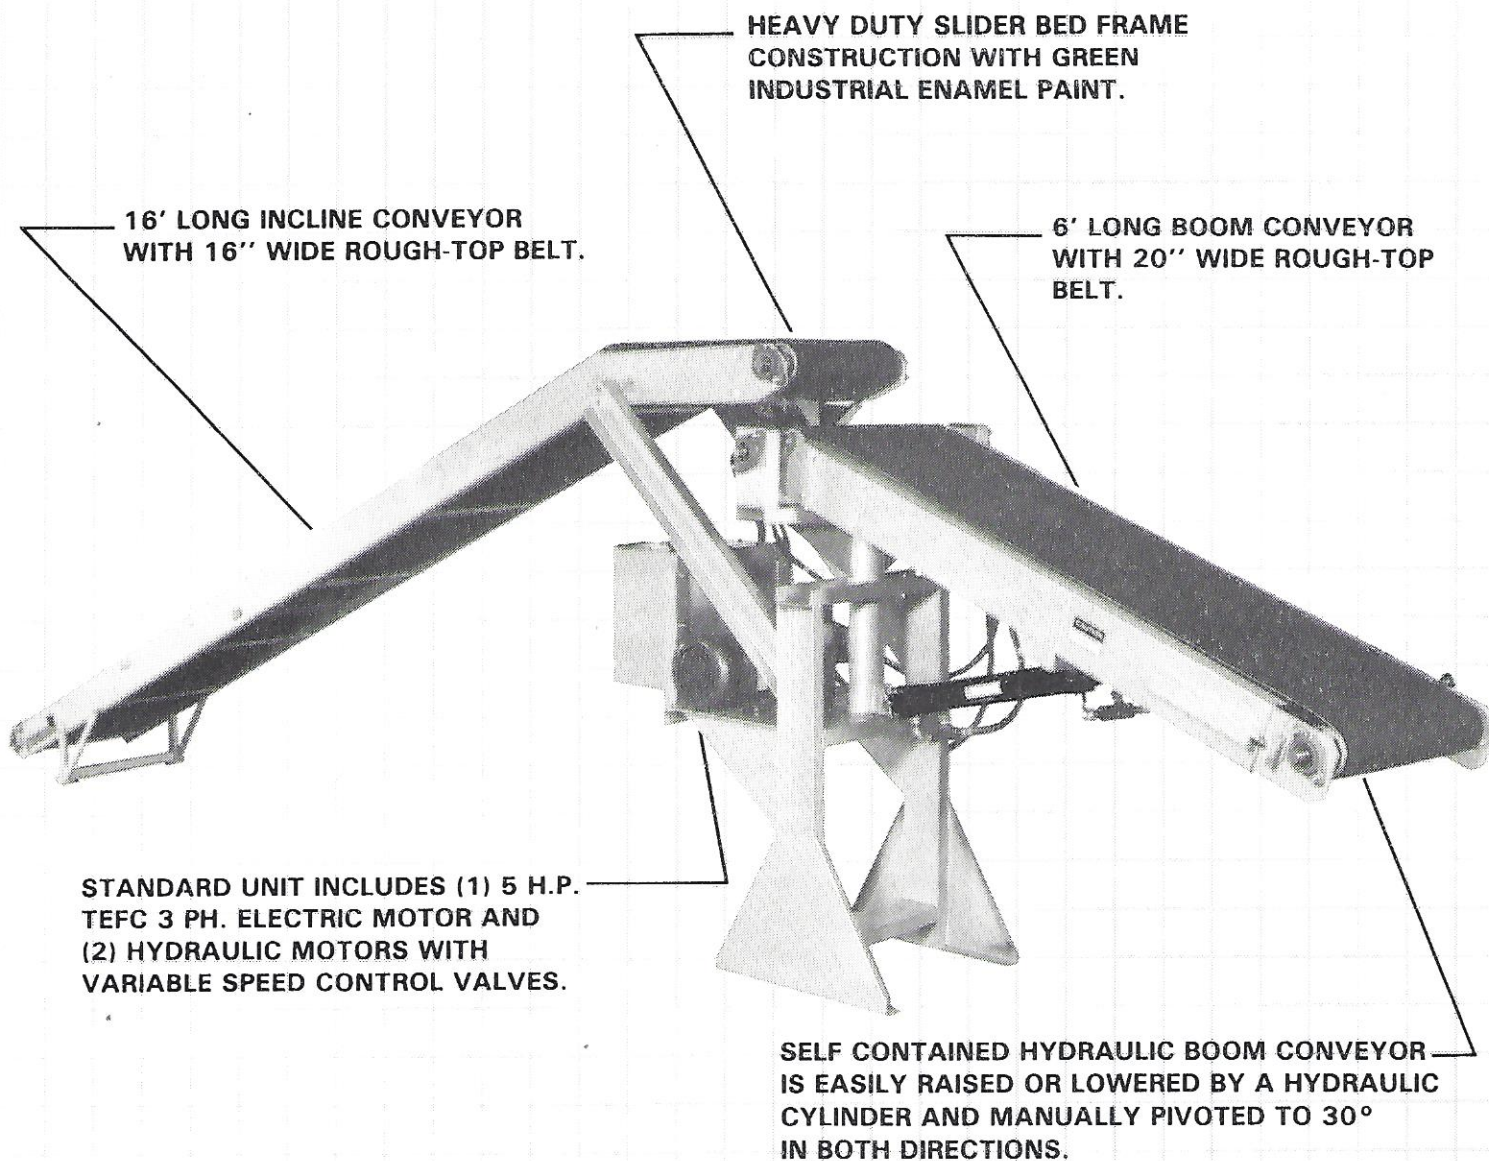


STANDARD UNIT INCLUDES (1) 5 H.P. TEFC 3 PH. ELECTRIC MOTOR AND (2) HYDRAULIC MOTORS WITH VARIABLE SPEED CONTROL VALVES.

SELF CONTAINED HYDRAULIC BOOM CONVEYOR IS EASILY RAISED OR LOWERED BY A HYDRAULIC CYLINDER AND MANUALLY PIVOTED TO 30° IN BOTH DIRECTIONS.

- ONE OPERATOR IS CAPABLE OF SERVICING (3) PALLET STATIONS BEFORE A FORK LIFT IS REQUIRED.

**THE**  
**CHANTLAND-PVS**  
**COMPANY**

P. O. BOX 69 • HUMBOLDT IA 50548  
PH: 515-332-4040 • FAX: 515-332-1502

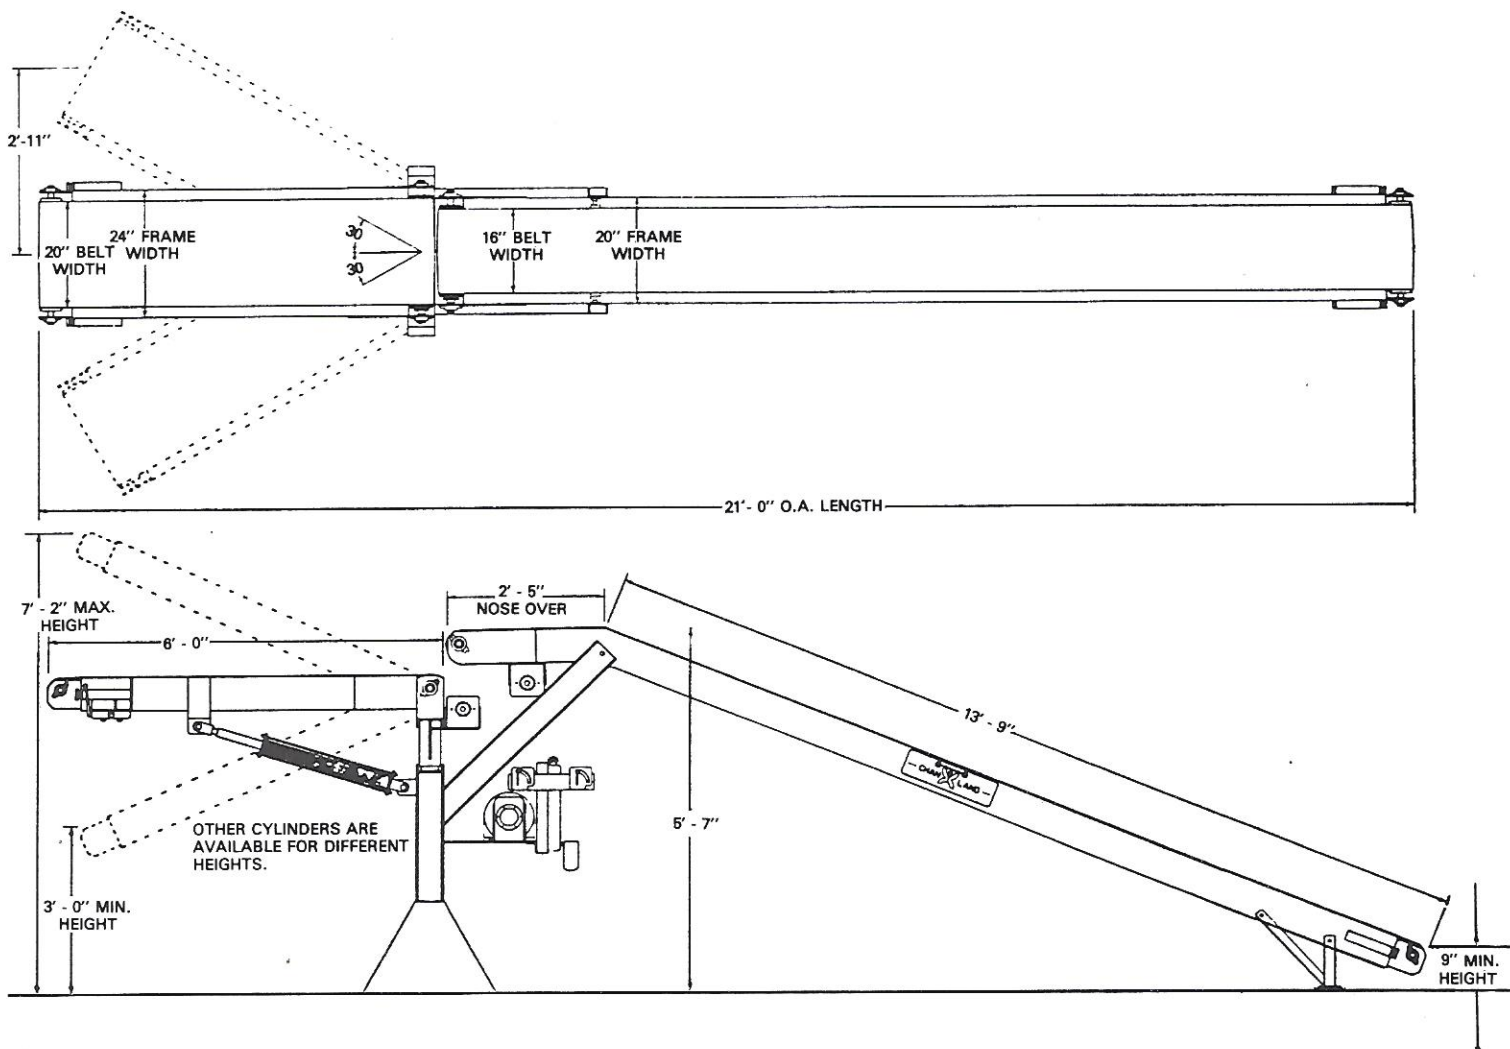

## STANDARD FEATURES

**FRAME:** Formed #12 ga. sheet steel. Slider type bed. Rigidly braced for strength. Depth of frame is 6".

**PULLEYS:** 4" dia. hydro crowned. Drive pulleys are lagged with 1-3/16" dia. shafts. Take-up pulleys are plain face with 1" dia. shafts.

**BEARINGS:** 2-hole flange. Sealed, self-aligning, and regreasable.

**BELT:** Top quality rough top with stainless steel clipper lacing. 16" wide on the incline conveyor. 20" wide on the 6'-0" conveyor.

**DRIVE:** Powered by (1) 5 H.P. totally enclosed 230/460V. 60 Cy. 3 PH electric motor. Conveyors are driven by (2) hydraulic motors with variable speed control valves.

**LIFT:** Boom conveyor is easily raised or lowered by a hydraulic cylinder and manually pivoted to 30° in both directions.


## OPTIONS

**LONGER UNITS:** Are available.

**ROLLER BED UNITS:** Are available for bags over 60#.

**APPROXIMATE WEIGHT**  
1500 lbs.

Dealer

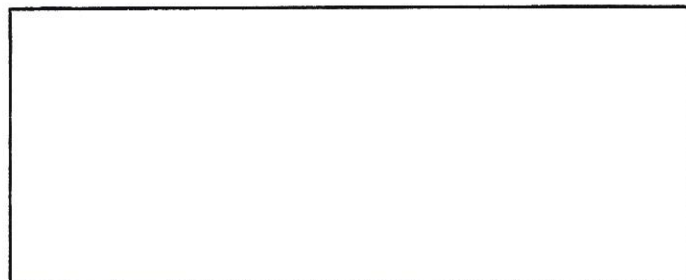

PRINTED IN USA